Safety Laser Scanner
F3G-C

Increases Safety by Detecting Workers to Warn of Proximity to Dangerous Area

Note: Be sure to read the *"Safety Precautions"* on page F-7.

Features

The Safety Laser Scanner Meets International Safety Standards

A Type 3 Sensor Conforming to IEC, EN, JIS, and UL Standards

Conforms to the international standards IEC 61496-1, EN standard 61496-1, and JIS standard B9704-1, which are essential for safety area sensors. As a Type 3 Sensor, it also satisfies the requirements for category 3 safety measures.

Conforms to EC Machinery Directive

Type 3 ESPE (Electro-Sensitive Protective Equipment) EC-type Examination Certificate, which is based on the Machinery Directive from the EU-notified body BIA, enabling using the Safety Laser Scanner with European machinery and equipment.

UL listing for US and Canadian safety standards

Can be used in equipment designed according to OSHA regulations and ANSI/RIA standards.

UL CE JIS B9704-1 EN61496-1 Type 3

Third Party Assessment Body UL listing for US and Canadian safety standards has been obtained for the Safety Laser Scanner. The Scanner can be used in equipment designed according to the US OSHA (Occupational Safety and Health Administration) regulations (29 CFR 1910. 212). The Scanner also satisfies the requirements of the ANSI/RIA R15.6-1999 safety standard for industrial robots in the US, enabling applications in US and Canadian equipment.

Laser Safety Considerations

The laser diode that emits the laser beam is a Class 1 laser, which is the lowest laser strength category.
(JIS C 6802, EN 60825-1 (IEC 825-1), FDA (21 CFR 1040. 10))

Prevents Robot from Restarting When Worker Is in Protective Field

Detection of Worker Prevents Unexpected Operation of Machinery

Ensuring safety is based on the principle that machinery will not start when a worker is present in the robot's operating zone or in the area around the machinery. A Safety Light Curtain or Door Switch detect when a worker enters the dangerous area, but once this zone is entered, the worker's presence cannot be monitored.

The F3G-C Safety Laser Scanner uses a laser beam to scan across a two-dimensional plane for the presence of workers in the designated area, acting as a reflective safety area sensor.

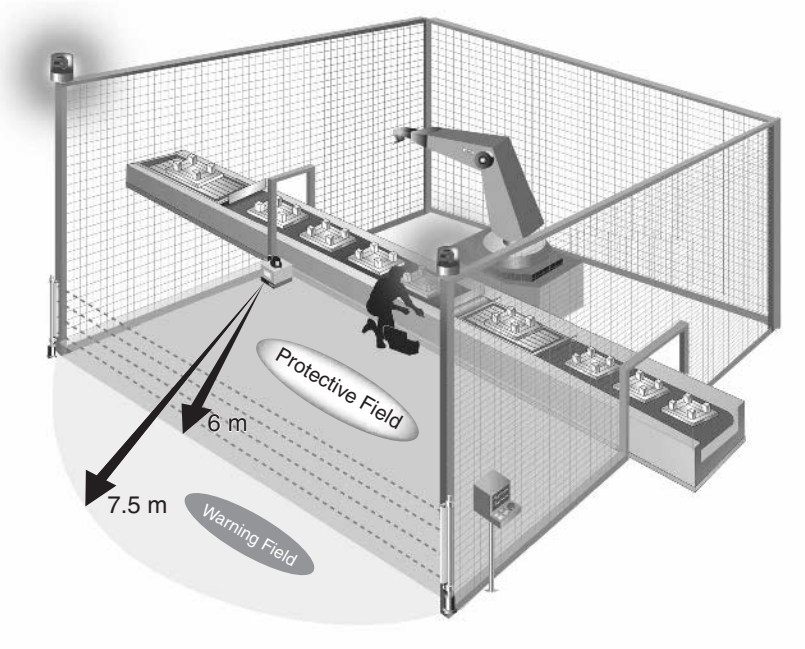

Warning Indicators Warn of Approach to Dangerous Area If the Warning Field Is Entered

Proximity Alarm Prevents Stopping Machinery Inadvertently

In addition to setting a protective field to prevent the operation of machinery, a warning field can also be set in which the detection of a worker approaching the machinery triggers an alarm. Entering or leaving the warning field is connected to warning indicators and sirens that alert the worker, thereby protecting against the unintentionally stopping machinery by approaching the source of danger.

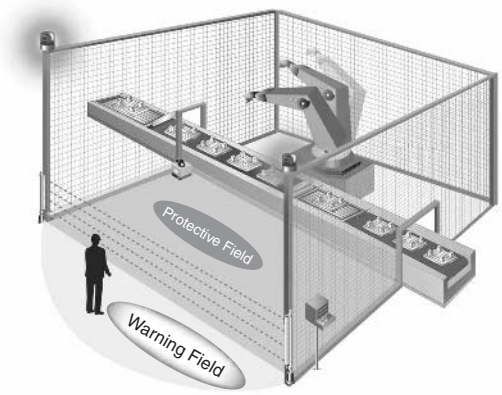

Easily Set the Monitoring Fields from a PC

The Protective Field and Warning Field can be easily set up from a personal computer using the CSL Setup Software provided with the Scanner.

Settings can be protected from changes by using a password, preventing unintentional changes.

The system requirements for running CSL Setup Software are as follows:

- CPU: Intel Pentium PC, 233 MHz or higher
- RAM: 64 MB or higher
- RS-232C: Serial interface*

  * The software may not function properly if a USB/RS-232C Serial Conversion Adapter is used.
- OS: Microsoft Windows 95, 98, NT 4.0, ME, 2000 Professional, or XP
- CD-ROM drive

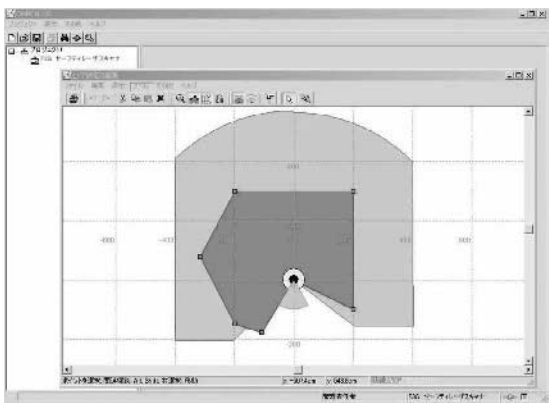

List of Models

Appearance	Product name	Model	Remarks
	Sensor	F3G-C1R70	Includes setup software CD.
	Power supply cable	F39-JG5A	One cable required for each Sensor.
	Communications cable	F39-JG5R	Required fro setup only.
	Mounting Bracket	F39-LG1	Includes the following items: Main bracket: 1 Side bracket (left): 1 Side bracket (right): 1 M8 Allen-head bolts: 4 M8 plain washers: 4

Ratings and Performance

Item	Model	F3G-C1R70
Safety category		Conforms to Type 3 ESPE EN/IEC 61496-1
Sensing range (includes safety supplement)		Protective field: 0 to 6 m Warning field: 0 to 7.5 m
Scanning angle		300°
Detection capability		Non-transparent, 70 mm in diameter (reflective rate of 1.8% min.)
Response time		280 ms max.
Reactivation time		200 to 5,000 ms (adjustable)
Supply voltage		24 VDC ±25% (ripple: 5 V p-p max, except for voltage drop due to cable extension)
Power consumption		24 W
Light source		Infrared Laser Diode (wavelength: 905 nm)
Laser protection class		Laser class 1 product conforms to the following standards: EN 60825-1, IEC 825-1, JIS C 6802, and 21 CFR 1040.10
Control output (output signal switching device)		Relay output: SPST-NO contact × 2 outputs, 30 V, 2 A (cosϕ=1) max. Switch life expectancy: 2,000,000 operations
Warning output (non-safety output)		Relay output: SPST-NO contact, 30 V, 2 A (cosϕ=1) max. Switch life expectancy: 2,000,000 operations
Protection		Control circuit: 3.15-A fuse (medium slow blow) Output: 2-A self-resetting fuse
Connection method		Power supply, output: 8-pin round connector (manufactured by Binder, 423 Series) Computer connection: 14-pin round connector (manufactured by Binder, 423 Series)
Communications method with computer		RS-232C
Ambient temperature		Operating: 0 to 50°C; Storage: −20 to 70°C
Ambient humidity		Operating/storage: 5% to 95% (with no condensation)
Vibration resistance (malfunction)		10 to 55 Hz with a 0.7-mm double amplitude, 20 sweeps each in X, Y, and Z directions
Shock resistance (malfunction)		100 m/s^2, 1,000 times each in X, Y, and Z directions
Degree of protection		IP65 (IEC 60529)
Cable (sold separately)	**Power supply, output**	0.5 mm^2, 8-wire, mesh shield; maximum extension length: 20 m; allowable bending radius: 90 mm
	Connection to computer	Maximum extension length: 5 m; allowable bending radius: 112 mm
Materials		Case: Aluminum; Optical surface, display: Glass
Weight		Sensor only: Approximately 3.0 kg; In packaging: Approximately 4.4 kg
Accessories		Instruction manual, CSL Setup Software (CD-ROM), and mounting screws (four, M4 × 10)

Connection Example (Category 3)

Connection with a G9SA-301 Safety Relay Unit

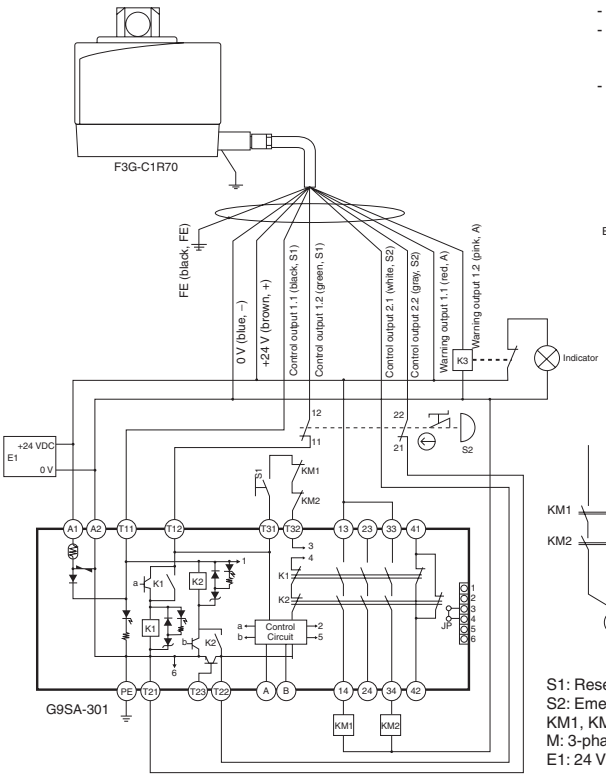





- Used together with a G9SA-301 Safety Relay Unit.
- G9SA-301 Safety Relay Unit Settings
  Manual reset mode
  Using feedback loop
- Using the Emergency Stop Switch

S1: Reset switch
S2: Emergency stop pushbutton switch (A165E or A22E)
KM1, KM2: Magnetic contactors (LP1D)
M: 3-phase motor
E1: 24 VDC power supply (S82K)

Dimensions

Note: All units are in millimeters unless otherwise indicated.

F3G-C1R70

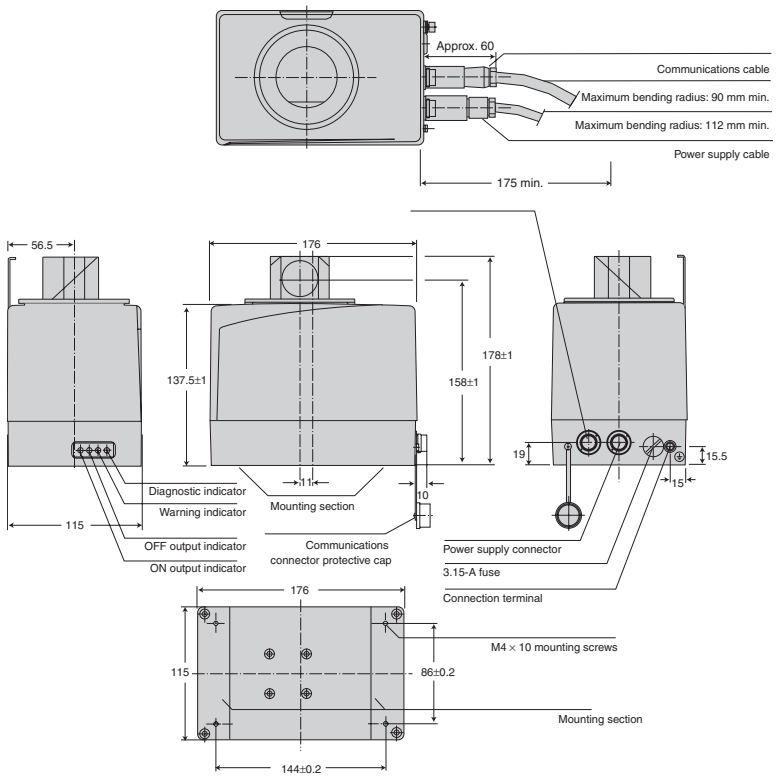

■ Accessories (Order Separately)

Mounting Brackets

F39-LG1
With Side Brackets

Note: Photo shows mounting example.

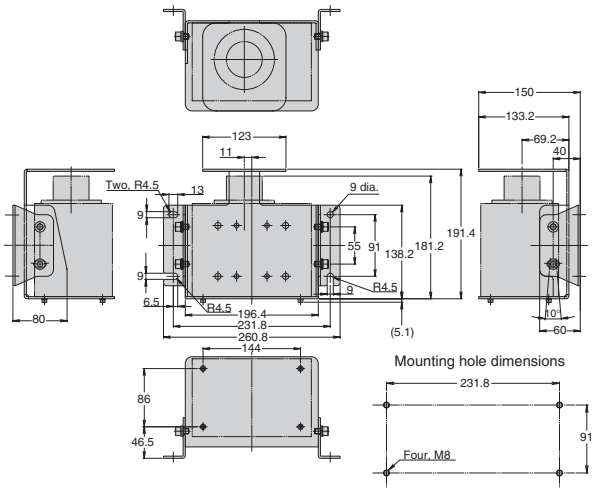

Without Side Brackets

Note: Photo shows mounting example.

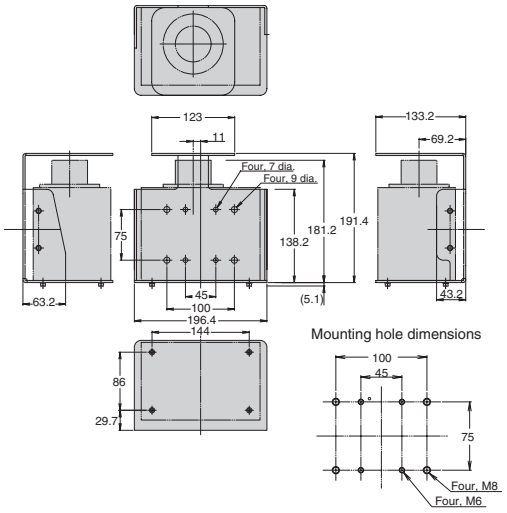

Safety Precautions

⚠ WARNING

This catalog is provided as a guide for selecting the product. Do not use the product without first thoroughly reading and understanding the instruction manual provided with the product (Cat. No. SCHG-704), and the CSL Setup Software User's Manual (provided on the CD-ROM).

Always have a qualified technician with appropriate training perform all of the following: Installing the F3G-C Safety Laser Scanner, setting up the designated monitoring area, and incorporating the product into the machine control system.

The user must operate the F3G-C Safety Laser Scanner according to the performance specifications and installation environment described in the operation manuals. Perform risk assessment with all associated personnel and use the product according to the results of risk assessment.

■ Precautions for Safe Use

Traceability

To ensure the performance of the safety functions, the product must be inspected before use and at regular intervals according to the methods in the instruction manual provided with the product. To ensure delivery of additional information on the safe use of the product, an OMRON representative will need to confirm the installation location of the product and register the user with the product's serial number. We ask for your cooperation in the required procedures.

■ Precautions for Correct Use

Do not use the product in ambient atmospheres or environments that exceed the rating.

The application examples in this catalog are provided for reference only. Always check the functions and safety of machinery and devices before using with the product.

Before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems, machines, and equipment that may have a serious influence on lives and property if used improperly, consult your OMRON representative. Make sure that the ratings and performance characteristics of the product are sufficient for the systems, machines, and equipment, and be sure to provide the systems, machines, and equipment with double safety mechanisms.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. F071-E1-01

In the interest of product improvement, specifications are subject to change without notice.

Terms and Conditions of Sale

1. Offer; Acceptance. These terms and conditions (these "Terms") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. Prices; Payment Terms. All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. Discounts. Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. Interest. Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. Orders. Omron will accept no order less than $200 net billing.
6. Governmental Approvals. Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. Taxes. All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. Financial. If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. Cancellation; Etc. Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. Force Majeure. Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. Shipping; Delivery. Unless otherwise expressly agreed in writing by Omron:
    a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
    b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
    c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
    d. Delivery and shipping dates are estimates only; and
    e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. Claims. Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. Warranties. (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See http://oeweb.omron.com or contact your Omron representative for published information.
14. Limitation on Liability; Etc. OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. Indemnities. Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. Property; Confidentiality. Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. Export Controls. Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (iii) sale of products to "forbidden" or other proscribed persons; and (ii) disclosure to non-citizens of regulated technology or information.
18. Miscellaneous. (a) Waiver. No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) Assignment. Buyer may not assign its rights hereunder without Omron's written consent. (c) Law. These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) Amendment. These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) Severability. If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) Setoff. Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) Definitions. As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. Suitability of Use. Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
   (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
   (ii) Use in consumer products or any use in significant quantities.
   (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
   (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product.
   NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. Programmable Products. Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. Performance Data. Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. Change in Specifications. Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. Errors and Omissions. Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

OMRON

Complete "Terms and Conditions of Sale" for product purchase and use are on Omron's website at www.omron.com/oei – under the "About Us" tab, in the Legal Matters section.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON

OMRON ELECTRONICS LLC
One Commerce Drive
Schaumburg, IL 60173
847-843-7900
For US technical support or other inquiries:
800-556-6766

OMRON CANADA, INC.
885 Milner Avenue
Toronto, Ontario M1B 5V8
416-286-6465

OMRON ON-LINE
Global - http://www.omron.com
USA - http://www.omron.com/oei
Canada - http://www.omron.ca

Cat. No. GC SAFETY-3 07/05 Specifications subject to change without notice Printed in USA